

INDUSTRIAL MULTICHANNEL DATA LOGGER

FieldLogger



www.novusautomation.com/en/fieldlogger

NOVUS
We Measure, We Control, We Record


HIGH DENSITY MEASUREMENT POINTS

Embedded I/Os:

- 8 Universal analog inputs: thermocouples, voltage, current and RTD sensors
- 8 Digital I/Os individually configurable as input or output
- 2 Relay outputs
- 128 virtual channels (refer to Mathematical Functions)

Expandable I/Os:

64 remote channels for any legacy Modbus (RTU) device

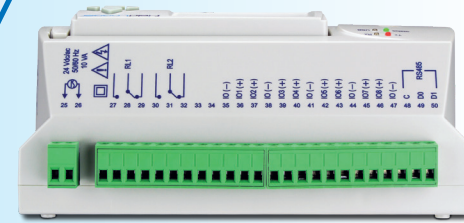

VERSATILE CONNECTIVITY FOR SEVERAL APPLICATIONS


The ethernet interface provides communication with multiple protocols: MQTT, Modbus TCP, Modbus gateway mode, FTP server/client, SMTP (e-mail), HTTP server (custom webpage) and SNMP. The wide range of connectivity allows real-time data for stand-alone application or as a component of supervisory system.

The RS485 interface enables to operate as Modbus RTU Master, reading remote devices or to operate as Modbus RTU Slave for communicating with off-the-shelf HMI, SCADA, or Host system.



LOCAL INDICATION HMI

With a dedicated RS485 serial port, **FieldLogger** offers an optional 2.4" color QVGA screen with current channel value, history chart and status information. It also allows to view and configure parameters via the keyboard. Despite of **FieldLogger** HMI model, it may be used with any off-the-shelf HMI in the market.

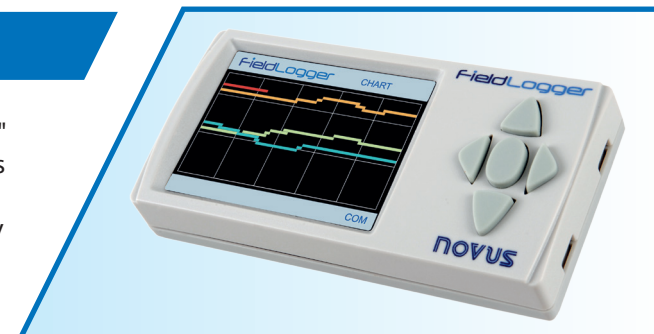

QUICK AND EASY STARTUP THROUGH SOFTWARE

Leading the way for all user experience levels, **FieldLogger** configuration software is designed for intuitive handling in wizard mode.

Beyond the usual data download, the software supports the data management in on-premises or cloud IT hosting infrastructure. The platform has built-in model reports intended to help deep and funded data analysis.




FDA CFR21 PART 11 COMPLIANT

Data integrity and access monitoring are two key points of the **FieldLogger** solution for validatable systems, which are essential in many applications, including the pharmaceutical industry. It is a complete solution, in a closed model, that can control all access to the system, providing traceability of who makes changes to the system and access control to the equipment.



ALLOWS TO RECORD
LEGACY MODBUS
INSTRUMENTS DATA




EXPANSIBLE CAPABILITY
TO INCREASE
MEASUREMENT
POINTS



HIGH SPEED LOGGING
FOR DYNAMIC
PROCESSES



DESIGNED TO
MEASURE MINOR
SIGNALS

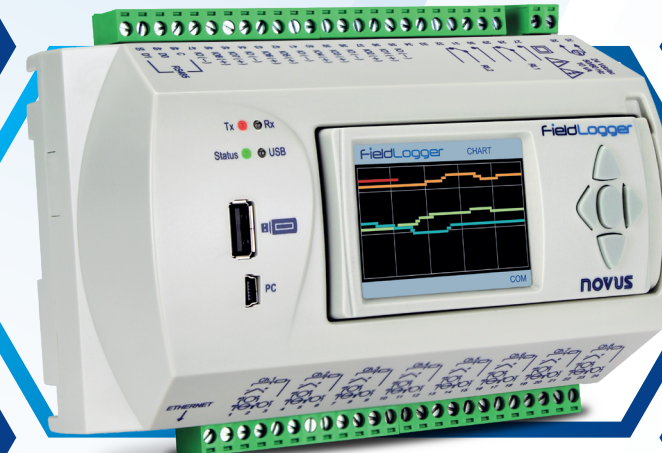

Developed to comply with the most dynamic processes requirements, **FieldLogger** has one of the fastest sampling and logging rates among the competition. In addition, its 24-bit resolution is able to detect sensitive measurement variations, which is an essential feature to reach high performance logging.

FieldLogger brings the legacy instruments data from factory floor to management visibility. Its expansion capability allows to increase the measurement points quantity through its communication interfaces to fit process needs.

Registering data from remote devices it gathers all variables in its memory. Therefore, the mass of data is kept available to be accessed through connectivity resources, complying with the demands of the IoT world.



EMBEDDED MEMORY
WITH EXTENSION
CAPABILITY

- Internal memory of up to 512,000 recordings
- Memory extension with SD or SDHC card
- Records more than 200 channels (local, remote or virtual variables)
- Recording rate of 1,000 logs/second (max)
- Data download through configuration software (USB device, RS485, Ethernet or USB drive)




ADVANCED MATH FUNCTIONS
FOR LOCAL PROCESSING OF
PROCESS DATA, OPTIMIZING
DECISION MAKING

- Supports up to 128 virtual channels
- Each virtual channel is a mathematical or logical operation performed over any input channel
- The result of one virtual channel can be used as input to another, which allows one to create complex formulas



PROCESS AWARENESS VIA
WARNING BY EMAIL AND
SNMP

- Up to 32 configurable alarms (with local, remote, or virtual channels)
- The occurrence of an alarm allows:
 - Relay activation
 - Digital outputs activation
 - Sending emails to multiple recipients
 - Sending SNMP traps
 - Start and stop logging

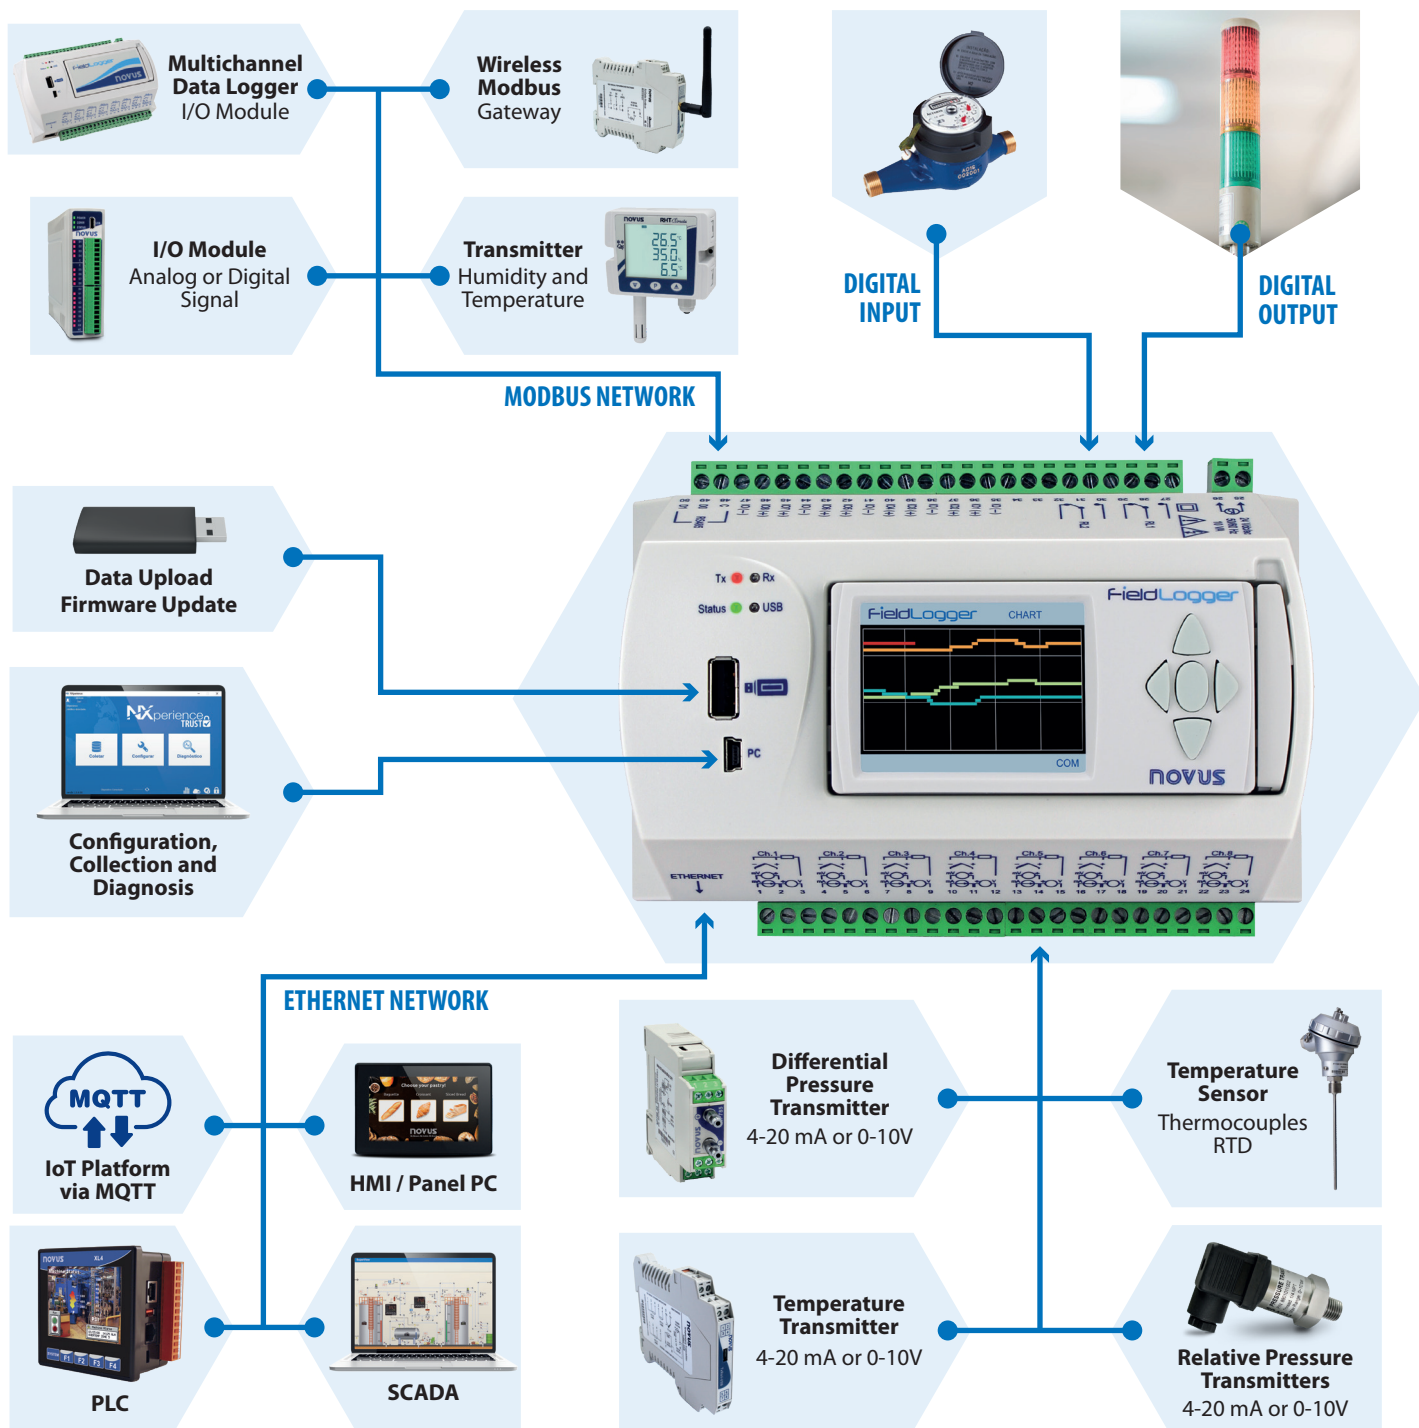

6100082 - 20250520 - Cat. FieldLogger - EN

Headquarters and Factory

Rua Engenheiro Homero Carlos Simon, 737
Guajuviras - 92442-000 - Canoas, RS - Brazil
Phone: +55 51 3323-3600
Technical Support: +55 51 4007-1596

São Paulo - Commercial Office

Rua Sampaio Viana, 75 - 12º floor
Paraíso - 04004-000 - São Paulo, SP - Brazil
Phone: +55 11 3097-8466
sp@novusautomation.com

Curitiba - Commercial Office

Rua Sete de Setembro, 4848 Cj.1301
Batel - 80240-000 - Curitiba, PR - Brazil
Phone: +55 41 3244-0514
pr@novusautomation.com

USA - Commercial Office

3 West Crystal Lake Avenue - Unit 2
Crystal Lake - 60014
Phone: +1 786 235-2674
info@novusautomation.com

Argentina - Commercial and Services Office

Zapiola, 829 C1426ATQ
Colegiales - Buenos Aires - Argentina
Phone: +54 11 4554-6441
argentina@novusautomation.com

Europe - Commercial Office

Via Oronte Nota, 73
Avigliana (TO) - 10051
Phone: +39 380 185 2737
europe@novusautomation.com